



# STICHT

## HAND TYPE

### SPECIFICATIONS

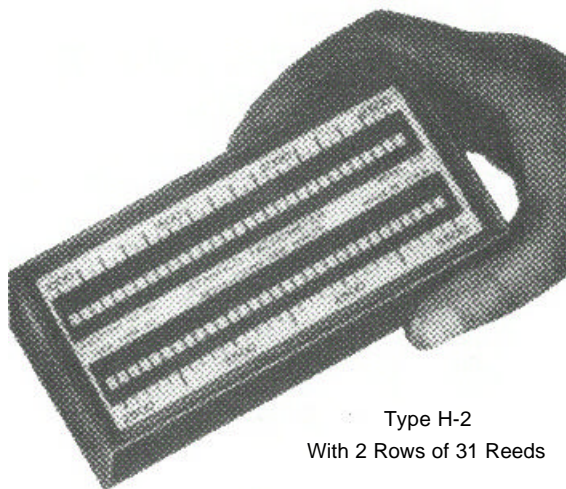

Type H-2  
With 2 Rows of 31 Reeds

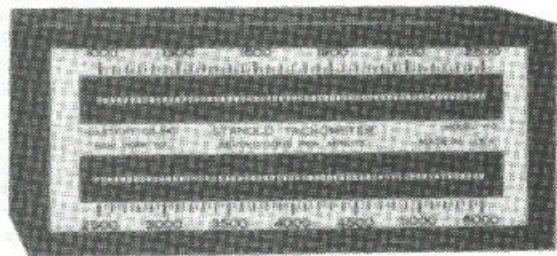

Type H-3  
With 2 Rows of 61 Reeds

### "STANDCO" Vibrating Reed Tachometers Hand Type

These instruments are ideal for checking speeds of totally enclosed electrical equipment. Just hold the Tachometer against motor, turbine, pump, vacuum cleaner, compressor or other similar equipment anywhere and read the speed.

These Tachometers are mounted in cases of cast aluminum alloy finished with black crackle enamel. Also available with bosses for permanent mounting.

Standard ranges are shown. Others can be furnished on special order. Lowest possible speed is 600 RPM. Highest 30,000 RPM.

#### DIMENSIONS

TYPE	RANGE R.P.M.	SIZE	WEIGHT
1 row	Up to 5000	5 12/16" x 1 11/16" x 3 9/16"	1 pound, 6 ozs.
1 row	Over 5000	6 7/16" x 2 3/4" x 3 3/4"	2 pounds, 4 ozs.
2 row	All Ranges	6 7/16" x 2 3/4" x 3 3/4"	2 pounds, 8 ozs.

ANY OTHER RANGES TO ORDER

TYPE H-1 One Row of 31 Reeds			
Our Cat. No.	Normal Speed R.P.M.	Range R.P.M.	Interval Between Reeds R.P.M.
6101	1200	900-1500	20
6103	1800	1425-2175	25
6104	3000	2250-3750	50
6106	3600	2850-4350	50
6107	4000	3250-4750	50
6111	5000	4250-5750	50
6115	6000	5250-6750	50
6116	6000	4500-7500	100
6117	6500	5000-8000	100
6118	7200	5700-8700	100
6119	8000	6500-9500	100
6122	12000	9000-15000	200
6124	15000	12000-18000	200
6126	20000	18000-24000	200
6127	25000	21000-30000	300

Type H-2 Two Rows of 31 Reeds			
6228-C	...	600-900	10
		900-1500	20
6230	...	900-1200	10
		1200-1800	20
6231	...	1000-1600	20
		1600-2200	20
6234	...	1500-2250	25
		2250-3000	25
6235	...	1750-2500	25
		2500-4000	50
6236	...	2250-3000	25
		3000-4500	50
6237	...	2000-3500	50
		3500-5000	50
6239	...	1000-2500	50
		2500-5500	100
6240	...	2500-4000	50
		4000-5500	50
6241	...	2750-4250	50
		4250-5750	50
6242	...	1500-3000	50
		3000-6000	100
6243	...	3000-4500	50
		4500-6000	50
6245	...	2200-3700	50
		3700-6700	100
6246	...	3000-4500	50
		4500-7500	100
6248	...	4500-6000	50
		6000-9000	100
6249	...	5500-7000	50
		7000-10000	100
6250	...	6000-9000	100
		9000-12000	100
6251	...	9000-12000	100
		12000-18000	200
6252	...	18000-24000	200
		24000-30000	200
6253	...	15000-21000	200
		21000-30000	300

Type H-3 Two Rows of 61 Reeds			
6355	1 <sup>st</sup> Row	1000-2500	25
	2 <sup>nd</sup> Row	2500-5000	50
		5000-6000	100
6356	1 <sup>st</sup> Row	1500-3000	25
	2 <sup>nd</sup> Row	3000-4500	50
		4500-7500	100
6360	1 <sup>st</sup> Row	3000-6000	50
	2 <sup>nd</sup> Row	6000-12000	100
6357	1 <sup>st</sup> Row	6000-12000	100
	2 <sup>nd</sup> Row	12000-24000	200
6358	1 <sup>st</sup> Row	7500-10000	100
	2 <sup>nd</sup> Row	10000-17000	200
		17000-23000	200
		23000-30500	250
6359	1 <sup>st</sup> Row	600-1200	25
	2 <sup>nd</sup> Row	1200-3000	50
		3000-4000	50
		4000-8000	100